



EMERGENCY
SENSOR



OCCUPANCY
SENSOR

2' | 3' | 4' | 8' LED RECESSED LINEAR LIGHT



DESCRIPTION

Protofos LED Recessed Linear combines sleek architectural design with adjustable wattage/CCT, and is sensor- and emergency-ready for energy code compliance. Available in 2', 3', 4', and 8' lengths for individual or continuous runs, with custom layouts using Line or L joiners.

WATTAGE INFORMATION

LENGTH	WATTAGE		
2'	20W	15W	10W
3'	30W	23W	15W
4'	40W	30W	20W
8'	80W	60W	40W

ORDERING INFORMATION

2' SKU: PF-PL-2432-10W-CCT-WH-R

3' SKU: PF-PL-3532-15W-CCT-WH-R

4' SKU: PF-PL-4732-20W-CCT-WH-R

8' SKU: PF-PL-9532-40W-CCT-WH-R

SPECIFICATIONS


SKU	SEE ORDERING INFORMATION
FINISH	WHITE
OTHER FINISHES	BLACK
COLLECTION	N/A
MATERIAL	ALUMINUM
DIFFUSER	POLYCARBONATE FROSTED

PRIMARY LIGHTING

LIGHT SOURCE	SEE WATTAGE TABLE
LUMENS	1050 LM/LF
# OF BULBS	INTEGRATED
VOLTAGE	120V - 277V
COLOR TEMP	30K 35K 40K
CRI	80+ STANDARD (90+ OPTIONAL)

DIMENSIONS


LENGTH	2'	3'	4'	8'
WIDTH	3.74"	3.74"	3.74"	3.74"
HEIGHT	3.74"	3.74"	3.74"	3.74"
WEIGHT	N/A	N/A	N/A	N/A

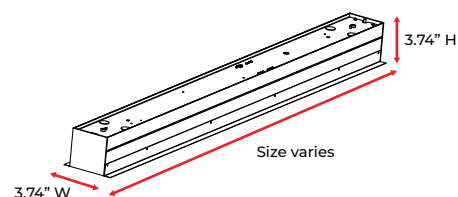

ADDITIONAL INFORMATION


CCT AND WATTAGE ADJUSTABLE

Lighting distribution selectable by using a switch located on the back — choose 100% down for a focused and optimal downward lighting experience.

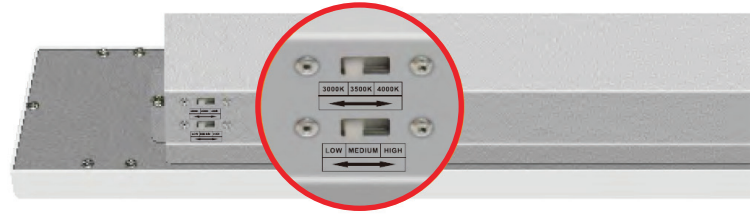


ILLUMINATED JOINER OPTIONS


Unleash lighting design flexibility with different patterns. A wide choice of joiners increases application flexibility; choose from "L" Pattern, "T" Pattern, or "X" Pattern.

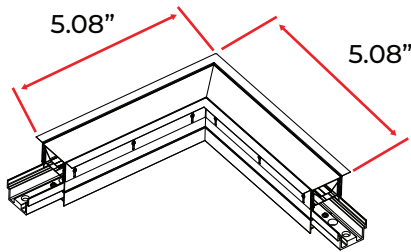

"L" Joiner

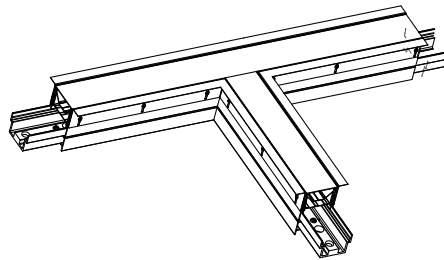


"T" Joiner

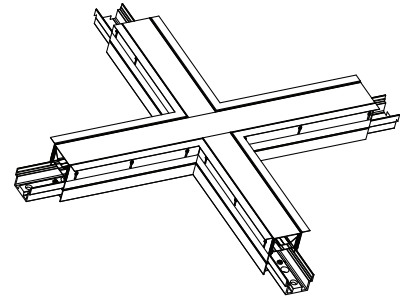

"X" Joiner

MOUNTING INFORMATION

Option 1: Mount by flanged trim and bracket in Dry ceiling.

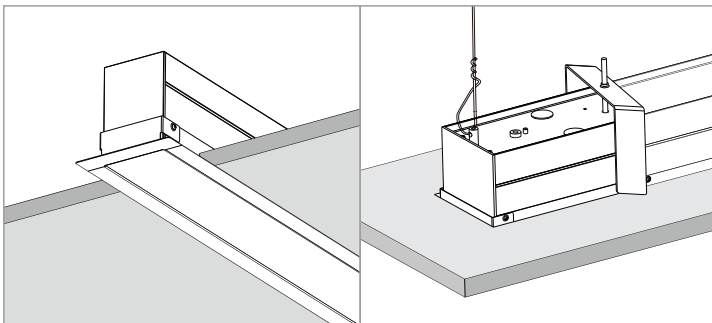

Option 2: Mount by flanged trim and pendant stem in Dry ceiling.

