


## PF-TL-120-RGB

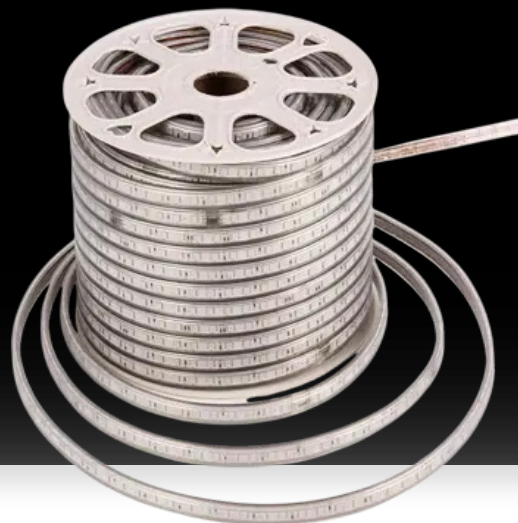

### DESCRIPTION

The 120V RGB LED Strip Tape light delivers vibrant, customizable lighting with 18 SMD 5050 LEDs per foot and 67 lumens per foot output. IP67-rated for water and dust resistance, it operates from -20°C to 60°C and supports runs up to 164 feet without extra connections. LED strip light is water resistant and dimmable.

### SPECIFICATIONS

Electrical	Input Voltage	120V AC
	Power Consumption	3 W/Ft ( 10 W/M)
Specs	Color Temperature	RGB
	Lumen Output	67Lm/Ft (220Lm/m)
	Dimmable	Yes, with dimmer controller
LED	Type	SMD LED 5050
	# Per Foot	18 LEDs (60LEDs/M)
Design	Dimensions (Inches)	0.59 x 0.31 Inches (W x H)
	Dimensions (Millimeters)	5 x 8 mm (W x H)
	Max Single Run Lenght	50M (164Ft)
	Cut Lenght	Cutttable every 100CM (3.2FT)
	Operating Temperature	-20°C ~ 60°C
	IP Rating	IP67
	Approved Location	Indoor/Outdoor
Warranty	2 Years	
Approvals	cETLus	



## FEATURES

VIBRANT RGB LIGHTING FOR DYNAMIC EFFECTS

IP67-RATED FOR INDOOR/OUTDOOR USE

SUPPORTS 164 FT (50M) SINGLE RUNS

SLIM PROFILE (0.59 X 0.31 INCHES) FITS TIGHT

SMD 5050 LEDS DELIVER UNIFORM RGB

OPERATES IN -20°C TO 60°C RANGE

DESIGNED FOR LONG-LASTING PERFORMANCE

DIMMABLE WITH A CONTROLLER

CERTIFIED SAFE WITH CETLUS

## INDOOR APPLICATION

ACCENT LIGHTING

HOME THEATERS

EVENT LIGHTING

RETAIL DISPLAY

UNDER-CABINET LIGHTING

## OUTDOOR APPLICATION

BUILDING FACADES

BRIDGE OR RAILING ILLUMINATION

PATHWAY LIGHTING

DECK AND PATIO LIGHTING

SIGNAGE ILLUMINATION

HOLIDAY DECOR

SPORTS COURTS

## ACCESSORIES



### PF-RGB-POWERCORD

Power Cord for  
RGB Color (20CM)



### PF-RGB-MIDDLECON

Waterproof Middle  
Connector (15CM)



### PF-RGB-ENDCAP

End Cap



### PF-RGB-FIXCLIP

Aluminum Fix Clip



### PF-HC04

Wireless RF RGB Touch  
Remote Controller



Protofos Corporation  
[www.protofos.com](http://www.protofos.com)

11350 Old Roswell Rd, Ste 1100, Alpharetta, GA 30009  
Information contained here is subject to change without notice