


PROTTOFOS

LIGHTING MANUFACTURER

PF-DD-USBAC-TR-20A-WH

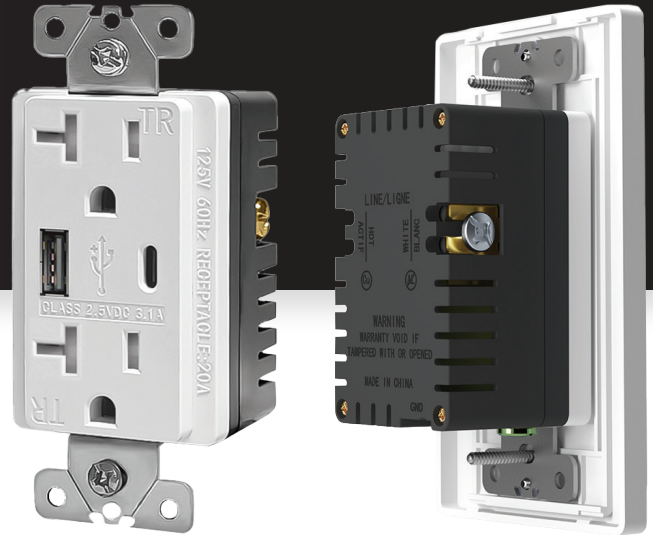

DESCRIPTION

20A, 125V NEMA 5-20R residential/commercial duplex outlet with integrated dual USB Type-A & Type-C ports (total 3.6A / 18W), tamper-resistant, UL listed. Ideal for living rooms, kitchens, classrooms, restrooms, and commercial offices.

FEATURES AND BENEFITS


Ground terminal clamp
allows for fast installation

High-impact-resistant thermoplastic construction for superior strength and durability

USB Type-A charging port

USB Type-C charging port

Captive Screws make for easier installation

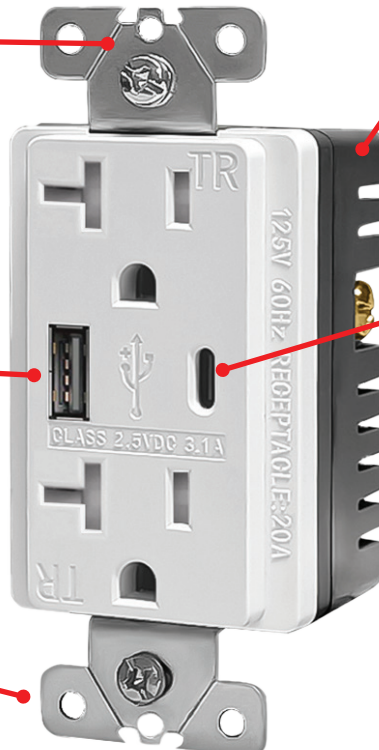

Prottos Corporation
www.prottos.com

11350 Old Roswell Rd, Ste 1100, Alpharetta, GA 30009
Information contained here is subject to change without notice

SPECIFICATIONS

CERTIFICATION	UL
STANDARD	UL498/CSA C22.2 No. 42, 7th Ed
RECEPTACLE RATING	20A, 125V NEMA 5-20 R
USB RATING	3.6A, 5V DC
USB A	5V DC 2.4A
USB C	5V DC 3.0A
OPERATING TEMP	-35°C to 66°C (-30°F to 150°F)
WIRING METHOD	Side Wire & Back Wire
WIRE GAUGE	#12 - #14 AWG Copper Wire
GRADE	Residential & Commercial Grade
POLE & WIRE	2-Pole, 3-Wire
GROUNDING	Self-Grounding
TAMPER-RESISTANT	Yes
WEATHER-RESISTANT	No
WALLPLATE	Standard / Screwless Wallplate Optional

MATERIAL CHARACTERISTICS

Material: Face, Thermoplastic; Body, Thermoplastic

0.8mm thick high-precision phosphorus bronze

1.2mm thick galvanized steel bracket

Silver alloy contacts with 30 silver layer thick

Coated PC board with Smart chip MCU to protect critical components from moisture

Enviromental: Flammability UL-94 V1 Rating

DIMENSIONS

